

22260300	DATA SHEET	
Valid from: 19.12.2023	AB-C4-M8MS-(L*)PUR	

Product description

- Sensor/actuator cable, 4-pol, PUR halogen-free, black
- Straight M8-plug on free conductor end



General characteristics

Number of pins	4
Ambient temperature	-25 °C to +90 °C (-13°F to 194°F) (plug / jack) -40 °C to +80 °C (-40°F to 176°F) (cable, fixed installation) -25 °C to +80 °C (-13°F to 176°F) (cable, movable installation)
Degree of protection	IP65 / IP67 / IP68
Coding	A-standard
Tightening torque	0,2 Nm (M8-connector)
Plugging cycles	≥ 100

Variation

Article number	Description	Length [m]	Configuration
22260300	AB-C4-M8MS-2,0PUR	2	straight
22260308	AB-C4-M8MS-5,0PUR	5	straight
22260318	AB-C4-M8MS-10,0PUR	10	straight

Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties

Rated voltage	60 V DC / 48 V AC
Rated current	4 A
Overvoltage category	II
Pollution degree	3

Mechanical properties

Plug

Inflammability class in accordance with UL 94	HB
Contact, material	CuSn
Contact carrier, material	TPU GF
Contact surface, material	Ni/Au
Knurl, material	Zinc diecasting, nickel-plated
Handle, material	TPU, flame retardant, self-extinguishing
Sealing, material	NBR

Line

Cable construction	4 x AWG24/32
Signal line, construction	32 x 0,1 mm
Conductor cross-section	0,25 mm ²
Conductor diameter including isolation	1,17 mm ± 0,02 mm
Cable outer diameter D	4,4 mm ± 0,15mm

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260300EN Version: 04	Page 1 of 2
---	---------------------------------------	-------------


22260300	DATA SHEET	
Valid from: 19.12.2023	AB-C4-M8MS-(L*)PUR	

Insulation color	brown, white, blue, black
Sheath color	grey-black, RAL 7021
Number of bending cycles	10.000.000
Bending radius	44 mm
Traveling distance	10 m
Traveling speed	3 m/s
Acceleration	5 m/s ²
Cable weight	23 kg/km
Outer coating, material	PUR
Wire insulation, material	PP
Insulation resistance	≥ 100 GΩ*km (bei 20 °C)
Conductor resistance	≤ 78 Ω/km (bei 20 °C)
Flame resistance	acc. to UL 758/1581 FT2 DIN EN 60332-2-2 (20 s)
Halogen-free	acc. to DIN VDE 0472 Part 815
Oil resistance	acc. to DIN EN 60811-2-1
Other resistances	resistant to hydrolysis and microbes good resistant to acids, lyes and solvents limited UV resistance acc. to DIN EN ISO 4892-2-A resistant to sea water


Standards/Approvals

Product standard, M8 connector	IEC 61076-2-104
UL-Listed, E-File	E249137


Technical drawing

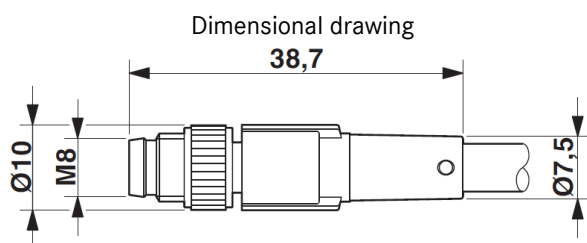

Plug M8 x 1, straight

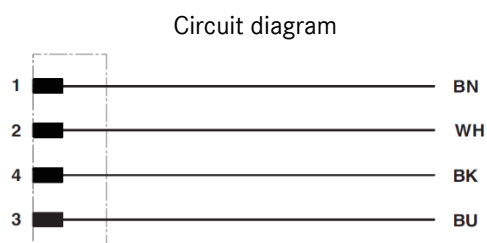


Pin assignment M8-plug

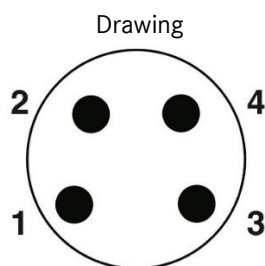

Pin assignment M8-plug, 4-pol, A-coding

Wire cross section



Application range

For increased mechanical load and rough operating conditions

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260300EN Version: 04	Page 2 of 2
---	---------------------------------------	-------------