



Single Pair Ethernet & Ethernet Advanced Physical Layer

Solutions for the future from a single source

Single Pair Ethernet (SPE)

Single Pair Ethernet is regarded as an important future technology for digitalisation in the production environment and has become an integral part of the promise of Industry 4.0. LAPP recognised the potential of SPE and got to grips with the technology at an early stage. In the coming years, SPE will replace today's fieldbus systems at the sensor-actuator level. LAPP already has a complete cable portfolio for use in industrial machines and systems.

Advantages:

- Replacement of fieldbuses with future-proof Single Pair Ethernet systems
- Standardisation of technology in IP-based networks, from the sensor to the ERP or into the cloud for the benefit of smart factories
- Material- and cost-saving as well as weight- and space-saving
- Significantly faster, simpler installation on site as well as reduced error rate
- Power over Data Line (PoDL) Supply of end devices with up to 50W via the data line
- Open cabling standard with compatible cabling components is suitable for universal use throughout the automation industry

Advanced Physical Layer (APL)

Ethernet Advanced Physical Layer is the gamechanger for networking at the field level - especially for the process industry. The technology extends the physical layer of Ethernet with important properties: it enables two-way communication over distances of up to 1000 metres at up to 10 Mbps. In addition, it supplies the connected power to the connected devices and offers intrinsic safety for hazardous areas. This makes it particularly interesting for the process industry and companies with potentially explosive installations.

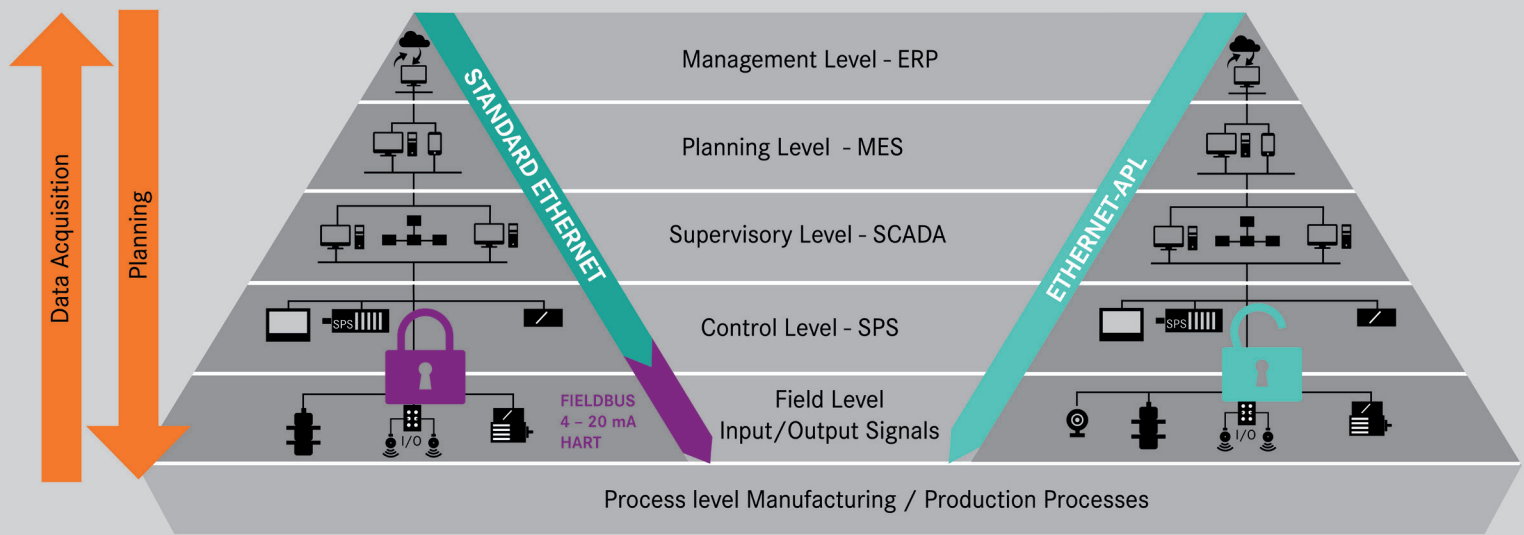
Advantages:



- Remote access and fast device configuration
- High data transmission speed and bandwidth
- Data and power transmission in parallel over the line
- Suitable for hazardous areas
- Simple integration into the process control system
- Modularity and expandability of systems is ensured
- Interoperability
- Future-proof technology: based on IEEE standard
- User support during development and installation
- Simplified installation and commissioning
- Increased reliability and availability
- Distance: Data transmission distances of up to 1000 metres
- Open cabling standard with compatible cabling components is suitable for universal use throughout the automation industry



Learn more about Single Pair Ethernet & Ethernet
Advanced Physical Layer:
www.lapp.com/en/de/e/000211





	Product	Outer jacket	Insert	Data rate	Length max.	Diameter
Cables	 ETHERLINE® T1 FD P 1x2x26/19AWG	PUR	Drag chain	Up to 100 Mbit/s	15 m	4,6 mm
	 ETHERLINE® T1 PN FLEX T Y 1x2x22/7AWG	PVC	Flexible	10 Mbit/s – 1 Gbit/s	40 m	5,8 mm
	 ETHERLINE® T1 PN FLEX Y 1x2x22/7AWG	PVC	Flexible	10 Mbit/s – 1 Gbit/s	40 m	5,5 mm
	 ETHERLINE® T1 FLEX Y 1x2x26/7AWG	PVC	Flexible	100 Mbit/s – 1 Gbit/s	15 m	4,6 mm
Patchcords	 EPIC® DATA SPE-6 PC M-M CT001	PVC	Flexible	100 Mbit/s – 1 Gbit/s	Various lengths available	5,8 mm
SPE APL cables for hazardous environments	 ETHERLINE® T1L FC Y 1x2x18/1AWG	PVC	Fixed	Up to 10 Mbit/s	Max. 1000 m	8,0 mm
	 ETHERLINE® T1 L FLEX FC Y 1x2x18/7AWG	PVC	Flexible	Up to 10 Mbit/s	Max. 1000 m	8,0 mm
EPIC® DATA SPE connectors	 EPIC® DATA SPE-6 FA M CS1 Pin version crimp Field-attachable					
	 EPIC® DATA SPE-6 PCB F PCB socket version					

Follow LAPP on:



Find our Sales Conditions under:
www.lapp.com/en/de/e/000010

U.I. Lapp GmbH

Schulze-Delitzsch-Straße 25 · 70565 Stuttgart
Tel.: 0711 7838-01 · Fax: 0711 7838-2640
www.lapp.com · info.de.uil@lapp.com

