

70474000	DATA SHEET	
Valid from: 15.06.2026	EPIC® H-A 16 AD-LB	

Description

- These connectors are attractive because of their compact housing.
- Small and compact for applications with high number of contacts
- Panel mount base housing with protective cover to protect the insert when not plugged in



General characteristics

Series	H-A 16
Design size	16A
Version	Panel-mount base
Locking	single lever
Protection cover	yes
Protection (DIN EN 60529)	IP 65 (latched)
Temperature range	-40°C to +125°C

Materials and surfaces

Housing	Aluminium alloy, powder-coated, grey
Lever	Steel, galvanized
Gasket	NBR

Approvals

UL File Number	In preparation
----------------	----------------


Standards

Safety Standard	IEC 61984
-----------------	-----------

Creator: LEBU1 / PDP Released: THBO1 / PDP	Document: DB70474000EN Version: 04	Page 1 of 2
---	---------------------------------------	-------------

70474000	DATA SHEET	
Valid from: 15.06.2026	EPIC® H-A 16 AD-LB	

Technical Drawings

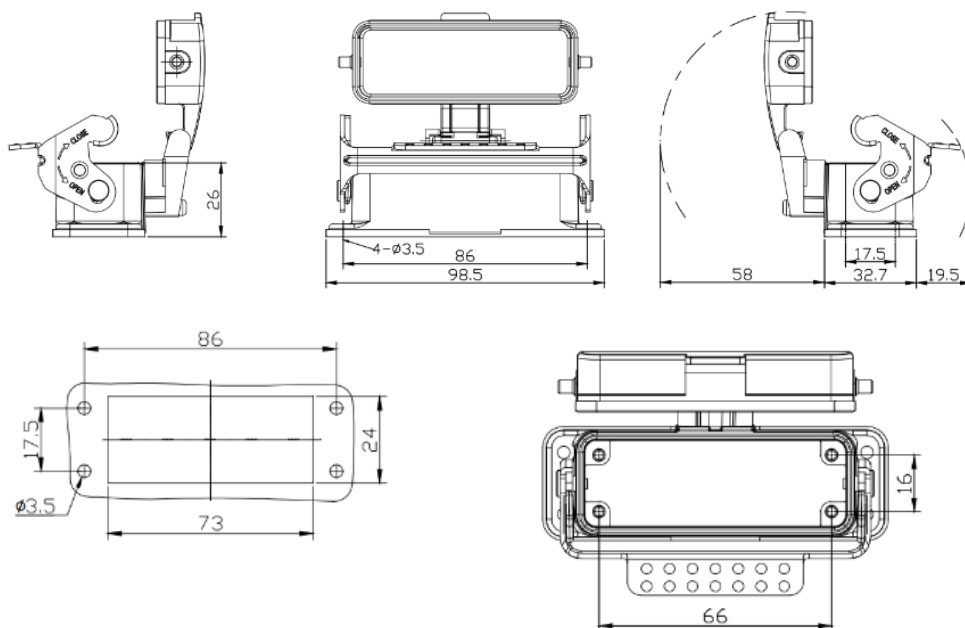

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Info

Compact, robust metal housings size 16A

Application range

Machine and equipment manufacturing

Control engineering

Electronic laboratory

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: LEBU1 / PDP Released: THBO1 / PDP	Document: DB70474000EN Version: 04	Page 2 of 2
---	---------------------------------------	-------------