

38119455	DATA SHEET	
Valid from: 14.08.2025	EPIC® H-Q AG	

Description

- The panel-mount base can be connected to many of the most popular hoods on the market.
- With open base for cable entry into the housing or control cabinet
- Locking takes place via a plastic central lever.
- Meets protection class IP 65 when locked.
- Withstands high environmental and mechanical stress.



General Characteristics

Series	H-Q
Version	Panel mount base
Locking	Central lever
Protection (DIN EN 60529)	IP 65 (latched)
Temperature Range	-40°C to +125°C

Materials / Surfaces


Housing	Polycarbonate
Lever	Polyamide

Standard


Safety Standard	IEC 61984
-----------------	-----------

38119455	DATA SHEET	
Valid from: 14.08.2025	EPIC® H-Q AG	

Technical Drawings

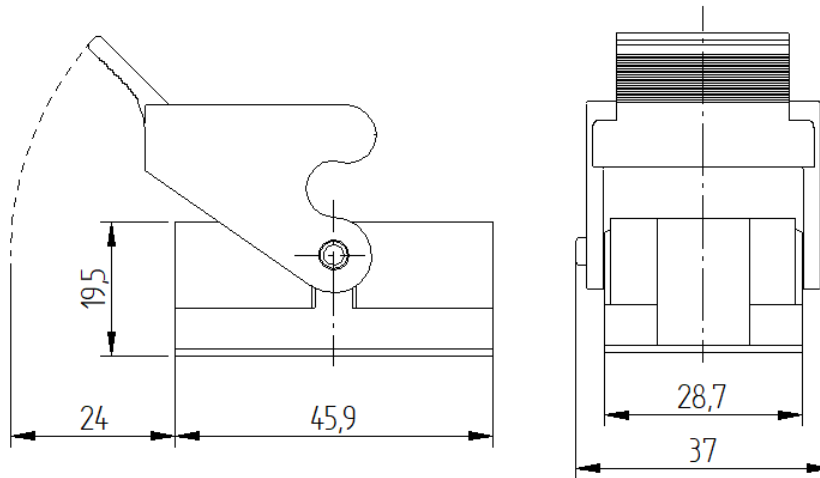

Panel cut out

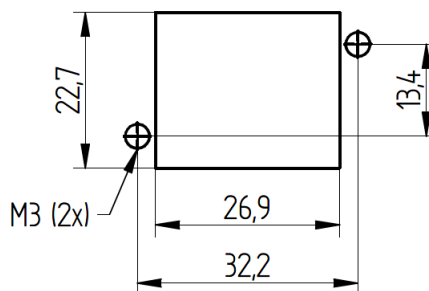

UV-resistant



Heat-resistant



Corrosion-resistant



Halogen free



Cold-resistant

Application range

For connecting devices and machines to a power supply in various applications. Typical areas of application are electric motors and servo drives.

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: TODV1/BU EPIC Released: FICE1/BU EPIC	Document: DB38119455EN Version: 02	Page 2 of 2
---	---------------------------------------	-------------