


19567100	DATA SHEET	
Valid from: 11.06.2026	EPIC® H-A 16 SGR-LB	

Description

- These connectors are attractive because of their compact housing.
- Small and compact for applications with high number of contacts

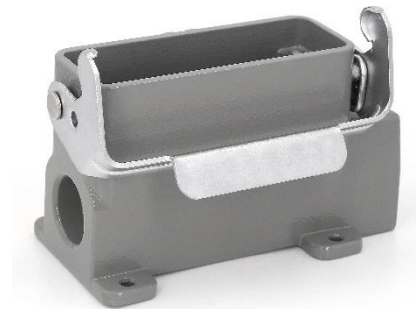

General characteristics

Series	H-A 16
Version	Surface-mount base
Locking	single lever
Cable entry, direction	Side, see table
Protection (DIN EN 60529)	IP 65 (latched)
Temperature range	-40 °C to +125 °C

Materials and surfaces

Housing	Aluminium alloy, powder-coated, grey
Lever	Steel, galvanized

Approvals

UL-Approval, E-File-Number	In preparation
----------------------------	----------------

Standards

Safety Standard	IEC 61984
-----------------	-----------


Versions

Article number	Article description	Cable entry (right)	Cable entry (left)
19567100	EPIC H-A 16 SGR-LB M20	M20	-
19567000	EPIC H-A 16 SGR-LB M25	M25	-
19568100	EPIC H-A 16 SGRL-LB M20	M20	M20
19568000	EPIC H-A 16 SGRL-LB M25	M25	M25

Creator: THBO1/PDP Released: TODV1/PDP	Document: DB19567100EN Version: 02	Page 1 of 2
---	---------------------------------------	-------------

19567100	DATA SHEET	
Valid from: 11.06.2026	EPIC® H-A 16 SGR-LB	

Technical Drawings

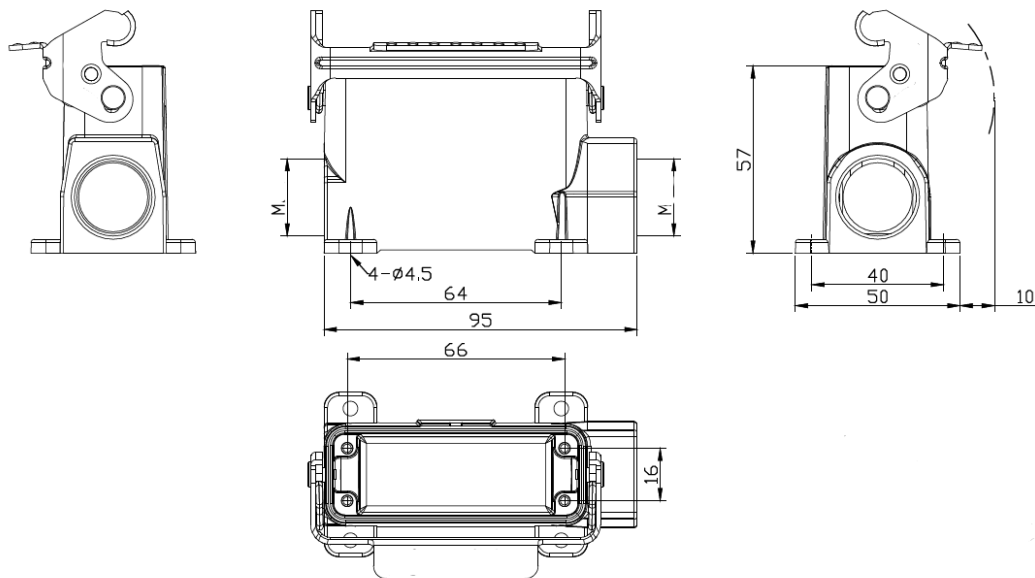

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Info

Compact, robust metal housings size H-A 16

Application range

Machine and equipment manufacturing, Control engineering, Electronic laboratory

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: THB01/PDP Released: TODV1/PDP	Document: DB19567100EN Version: 02	Page 2 of 2
---	---------------------------------------	-------------