

10103000	DATA SHEET	
Valid from: 08.06.2026	EPIC® H-B 24 AD-BO	

Description

- Ideal for many applications due to a wide range of housings and inserts



General Characteristics

Series	H-B 24
Version	Panel mount base
Protection cover	Yes
Locking	Bolts for double lever
Protection (DIN EN 60529)	IP 65 (latched)
Temperature Range	-40°C to +125°C

Materials and Surfaces

Housing	Aluminium alloy, powder-coated, grey
Bolts	Steel, galvanized
Sealing	NBR

Approvals

UL File Number	In preparation
----------------	----------------


Standard

Safety Standard	IEC 61984
-----------------	-----------

Creator: LEBU1 / PDP Released: THBO1 / PDP	Document: DB10103000EN Version: 03	Page 1 of 2
---	---------------------------------------	-------------

10103000	DATA SHEET	
Valid from: 08.06.2026	EPIC® H-B 24 AD-BO	

Technical Drawings

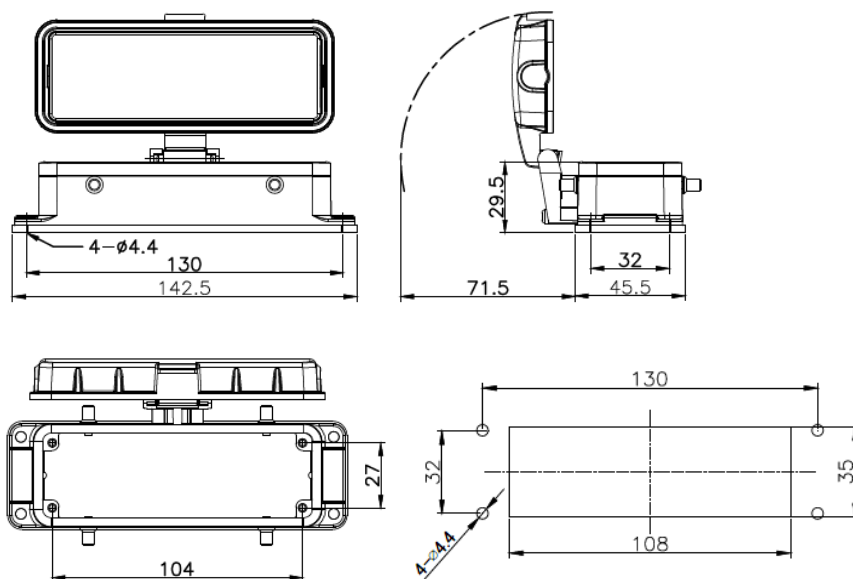

Automation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Info

Universal, robust metal housings size H-B 24

Application range

Plant engineering

Light & sound technology

Plastics industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: LEBU1 / PDP Released: THBO1 / PDP	Document: DB10103000EN Version: 03	Page 2 of 2
---	---------------------------------------	-------------