

79455200	DATA SHEET	
Valid from: 12.06.2026	EPIC® H-A 10 SDR-LB	

Description

- These connectors are attractive because of their compact housing.
- Small and space-saving for narrow available space



General characteristics

Series	H-A 10
Version	Surface-mount base
Locking	single lever
Protection cover	yes
Cable entry	Side, see table
Protection (DIN EN 60529)	IP 65 (latched)
Temperature range	-40°C to +125°C

Materials and surfaces

Housing	Aluminium alloy, powder-coated, grey
Lever	Steel, galvanized
Gasket	NBR

Approvals

UL-Approval, E-File-Number	In preparation
----------------------------	----------------

Standards

Safety Standard	IEC 61984
-----------------	-----------


Versions

Article number	Article description	Cable entry (right)	Cable entry (left)
79455200	EPIC H-A 10 SDR-LB M20	M20	-
79455400	EPIC H-A 10 SDR-LB M25	M25	-
79456200	EPIC H-A 10 SDRL-LB M20	M20	M20
79456400	EPIC H-A 10 SDRL-LB M25	M25	M25

Creator: THB01/PDP Released: TODV1/PDP	Document: DB79455200EN Version: 02	Page 1 of 2
---	---------------------------------------	-------------

79455200	DATA SHEET	
Valid from: 12.06.2026	EPIC® H-A 10 SDR-LB	

Technical Drawings

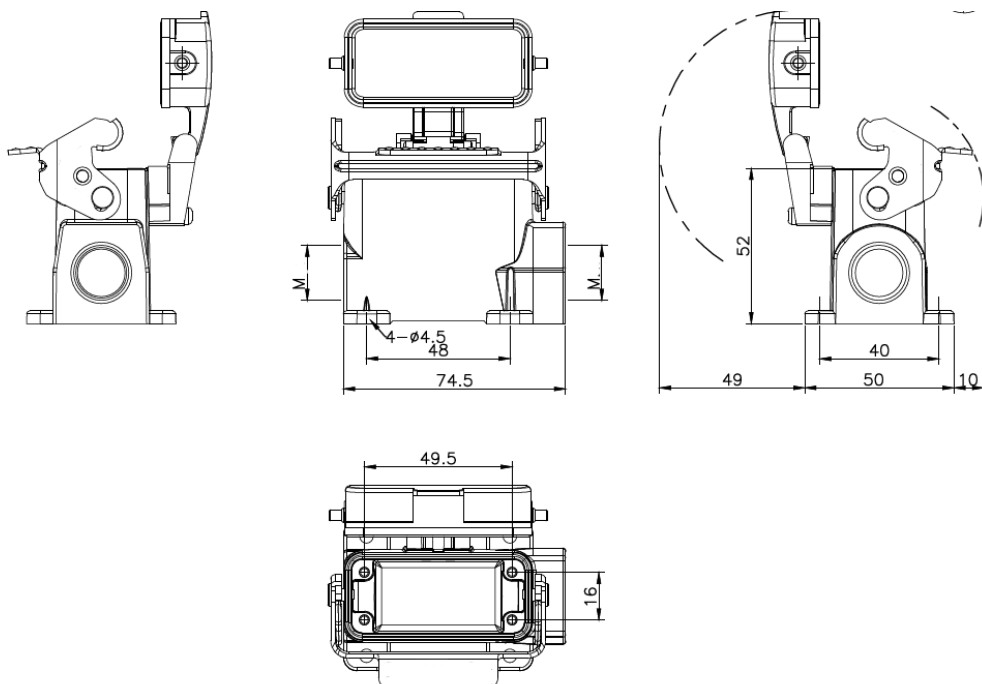

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Info

Compact, robust metal housings size H-A 10

Application range

Machine and equipment manufacturing, Control engineering, Electronic laboratory

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: THB01/PDP Released: TODV1/PDP	Document: DB79455200EN Version: 02	Page 2 of 2
---	---------------------------------------	-------------