

19036900	DATA SHEET	
Valid from: 10.06.2026	EPIC® H-B 10 SDR-LB	

Description

- The right housing is available for every application.



General Characteristics

Series	H-B 10
Version	Surface Mount Base
Protection cover	Yes
Locking	Single lever
Cable entry	Side, see table
Protection (DIN EN 60529)	IP 65 (latched)
Temperature Range	-40°C to +125°C

Materials and Surfaces

Housing	Aluminium alloy, powder-coated, grey
Cover	Aluminium alloy, powder-coated, grey
Lever	Steel, galvanized
Sealing	NBR

Approvals

UL-Approval, E-File-Number	In preparation
----------------------------	----------------

Standard

Safety Standard	IEC 61984
-----------------	-----------


Versions

Article number	Article description	Cable entry (right)	Cable entry (left)
19036900	EPIC H-B 10 SDR-LB M20	M20	-
79064600	EPIC H-B 10 SDR-LB M25	M25	-
19038900	EPIC H-B 10 SDRL-LB M20	M20	M20
79065600	EPIC H-B 10 SDRL-LB M25	M25	M25

Creator: THB01/PDP Released: TODV1/PDP	Document: DB19036900EN Version: 02	Page 1 of 2
---	---------------------------------------	-------------

19036900	DATA SHEET	
Valid from: 10.06.2026	EPIC® H-B 10 SDR-LB	

Technical Drawings

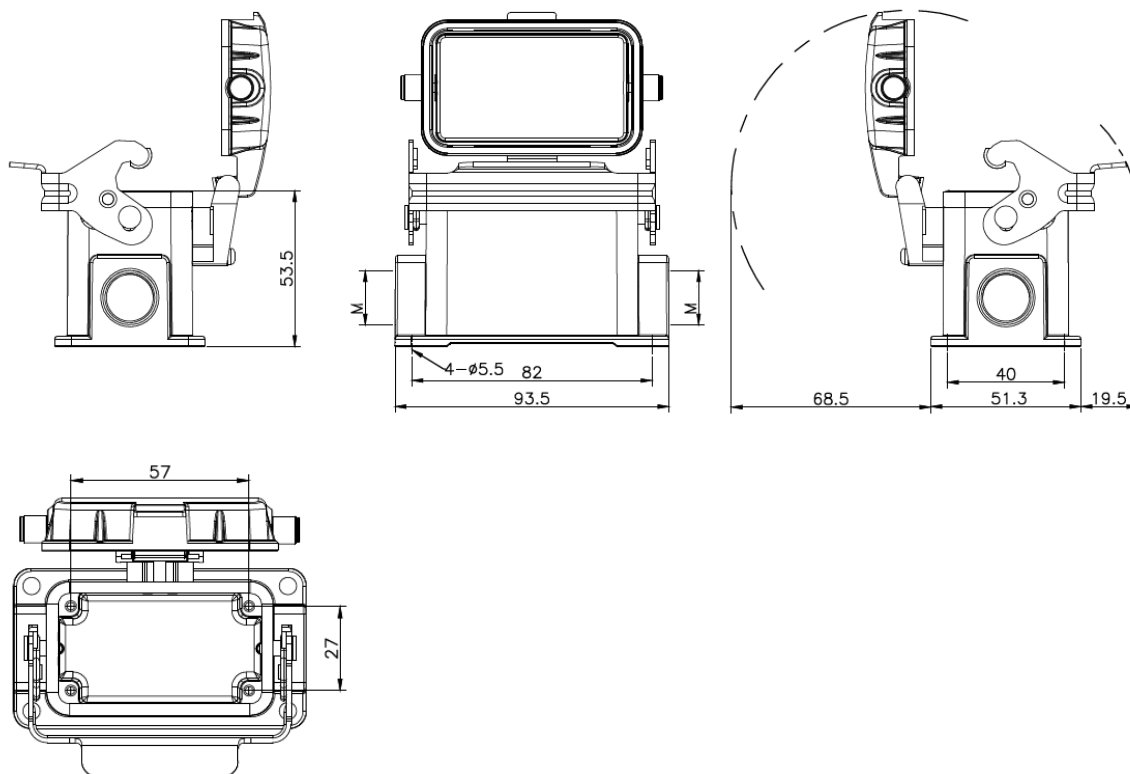

Automation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Info

Universal, robust metal housings size H-B 10

Application range

Plant engineering
Light & sound technology
Plastics industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: THB01/PDP Released: TODV1/PDP	Document: DB19036900EN Version: 02	Page 2 of 2
---	---------------------------------------	-------------