

79015200	DATA SHEET	
Valid from: 11.06.2026	EPIC® H-B 6 SDRH-LB	

Description

- The smallest housing out of the H-B series.
- For inserts with high properties.



General Characteristics

Series	H-B 6
Version	Socket housing
Protection cover	Yes
Locking	Single lever
Cable entry	Side, see table
Protection (DIN EN 60529)	IP 65 (latched)
Temperature Range	-40°C to +125°C

Materials and Surfaces

Housing	Aluminium alloy, powder-coated, grey
Lever	Steel, galvanized
Sealing	NBR

Approvals

UL-Approval, E-File-Number	In Preparation
----------------------------	----------------

Standard


Safety Standard	IEC 61984
-----------------	-----------

Versions

Article number	Article description	Cable entry (right)	Cable entry (left)
79015200	EPIC H-B 6 SDRH-LB M25	M25	-
79015400	EPIC H-B 6 SDRH-LB M32	M32	-
79016200	EPIC H-B 6 SDRH-LB M25	M25	M25
79016400	EPIC H-B 6 SDRH-LB M32	M32	M32

79015200	DATA SHEET	
Valid from: 11.06.2026	EPIC® H-B 6 SDRH-LB	

Technical Drawings

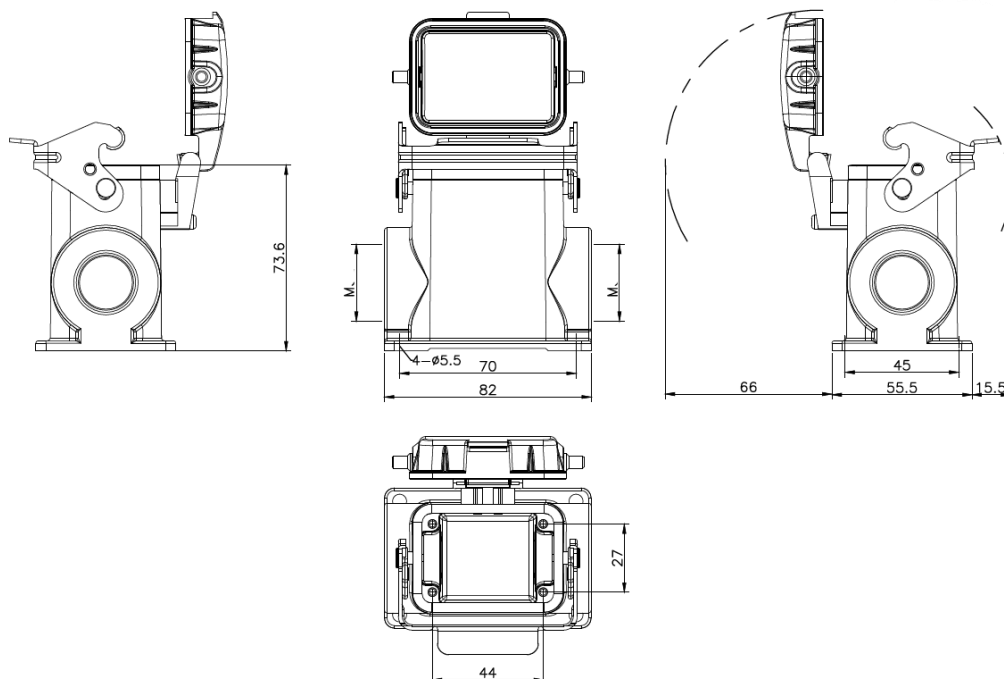

Automation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Info

Universal, robust metal housings size H-B 6

Application range

Plant engineering, Control engineering, Plastics industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: THB01/PDP Released: TODV1/PDP	Document: DB79015200EN Version: 03	Page 2 of 2
---	---------------------------------------	-------------