

22260775	DATA SHEET	
Valid from: 24.01.2024	AB-PB-M12MS-(L*)PUR-M12FS	

Product description

- Bus system cable, 2-pol, shielded, PUR purple
- PROFIBUS (12 Mbit/s)
- Straight M12-plug fast connect on straight
M12-jack fast connect



General characteristics

Fieldbus	PROFIBUS, 12 MBit/s (max. 100 m)
Number of pins	2
Ambient temperature	-25 °C to +90 °C (-13°F to 194°F) (plug / jack) -40 °C to +80 °C (-40°F to 176°F) (cable, fixed installation) -30 °C to +70 °C (-22°F to 158°F) (cable, movable installation) -20 bis +60 °C (-4°F bis 140°F) (at installation) -20 bis +60 °C (-4°F bis 140°F) (cable, drag chain use)
Degree of protection	IP65 / IP67
Coding	B- inverse
Tightening torque	0,4 Nm (M12-connector)
Plugging cycles	≥ 100

Variation

Article number	Description	Length [m]	Configuration
22260955	AB-PB-M12MS-0,2PUR-M12FS	0,2	straight - straight
22260773	AB-PB-M12MS-0,3PUR-M12FS	0,3	straight - straight
22262206	AB-PB-M12MS-0,6PUR-M12FS	0,6	straight - straight
22260774	AB-PB-M12MS-1,0PUR-M12FS	1	straight - straight
22260775	AB-PB-M12MS-2,0PUR-M12FS	2	straight - straight
22260869	AB-PB-M12MS-3,0PUR-M12FS	3	straight - straight
22260776	AB-PB-M12MS-5,0PUR-M12FS	5	straight - straight
22260777	AB-PB-M12MS-10,0PUR-M12FS	10	straight - straight
22260907	AB-PB-M12MS-15,0PUR-M12FS	15	straight - straight
22260908	AB-PB-M12MS-20,0PUR-M12FS	20	straight - straight

Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties


Rated voltage	60 V DC / 48 V AC
Rated current	4 A
Overvoltage category	II
Pollution degree	3
Characteristic impedance, line	150 Ω ± 10 % (3 MHz ... 20 MHz)

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260775EN Version: 04	Page 1 of 3
---	---------------------------------------	-------------

22260775	DATA SHEET	
Valid from: 24.01.2024	AB-PB-M12MS-(L*)PUR-M12FS	


Technical drawing

Dimensional drawing

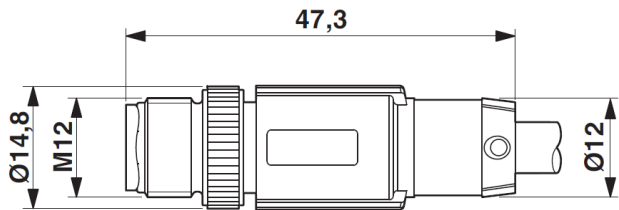


Plug M12 x 1, straight, shielded

Dimensional drawing

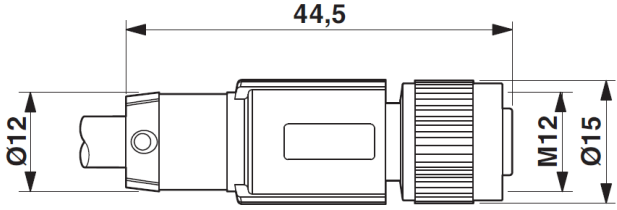


Jack M12 x 1, straight, shielded

Drawing




Pin assignment M12-plug, 5-pol, B-coding

Drawing

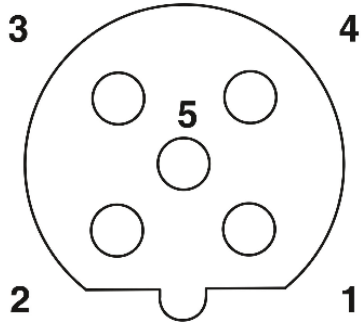

Pin assignment M12-jack, 5-pol, B-coding

Circuit diagram

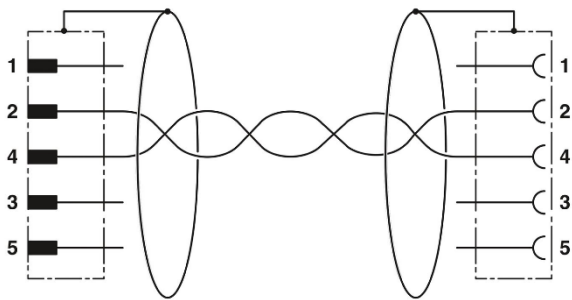

Pin assignment between M12-plug and M12-jack

Wire cross section



Application range

Automation, industrial machinery and plant engineering

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260775EN Version: 04	Page 3 of 3
---	---------------------------------------	-------------