

2170570	DATA SHEET	
Valid from: 26.03.2026	ETHERLINE® PN CABINET Cat.6A	

Description

- PROFINET patchcords Cat.6A, shielded
- For PROFINET application in control cabinet
- Straight RJ45-plug on straight RJ45-plug



General characteristics

Connection method, connector	RJ45-plug
Number of pins	8
Ambient temperature (operation)	-40 to +70 °C (-40°F to +158°F)
Degree of protection	IP 20
Shielding	shielded, S/FTP
Colour coding (pin assignment)	TIA/EIA-568-B
Conformity	RoHS conform REACH conform

Variation

Article	Description	Length (L*)[m]
2170570	ETHERLINE PN Cabinet Cat. 6a 0,25	0.25
2170571	ETHERLINE PN Cabinet Cat. 6a 0,5	0.5
2170572	ETHERLINE PN Cabinet Cat. 6a 1,0	1.0
2170573	ETHERLINE PN Cabinet Cat. 6a 1,5	1.5
2170574	ETHERLINE PN Cabinet Cat. 6a 2,0	2.0
2170575	ETHERLINE PN Cabinet Cat. 6a 2,5	2.5
2170576	ETHERLINE PN Cabinet Cat. 6a 3,0	3.0
2170577	ETHERLINE PN Cabinet Cat. 6a 4,0	4.0
2170578	ETHERLINE PN Cabinet Cat. 6a 5,0	5.0
2170579	ETHERLINE PN Cabinet Cat. 6a 10,0	10.0
217xxx*	ETHERLINE PN Cabinet Cat. 6a xx	xx

* Other lengths available. This data sheet also applies to lengths not listed here.

Related description

ETHERLINE® PN Cabinet Cat. 6a L*(Cable length <=5m)
ETHERLINE® Cabinet Cat. 6a L*(Cable length >5m)

Electrical properties

Operating voltage	50 V DC (max.)
Current carrying capacity	1 A (max.)



Transmission characteristics

Category (ISO 11801-1)	5 (PROFINET installation guideline) 6A (patchcord standard)
------------------------	--

Creator: JUKL2 / BU EPIC Released: IVSE1 / BU EPIC	Document: DB2170570EN Version: 00	Page 1 of 3
---	--------------------------------------	-------------

Connector pin assignment

Assignment 1:1 T568B

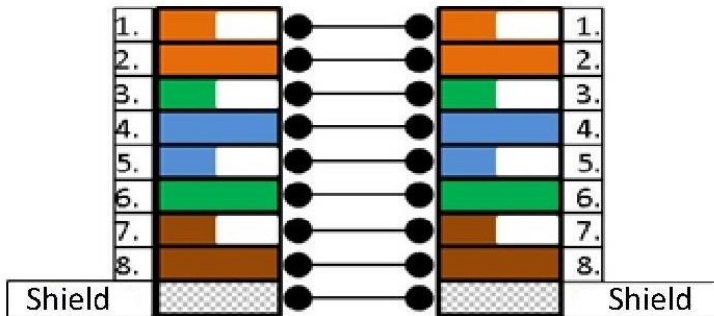

- 1 white-orange
- 2 orange
- 3 white-green
- 4 blue
- 5 white-blue
- 6 green
- 7 white-brown
- 8 brown


Mechanical properties

RJ45-plug


Flammability class acc. UL 94
 contact, material
 housing & insert, material
 snap-nose, material
 bend protection, material

PC → V0
 Cu, gold plated
 PC, crystal clear
 PE, in jacket color
 TPE, in jacket color

Line (Lapp Article number: 2170934)



Certification	E63634 cRUus AWM Style 21238 80°C 600V I/II A/B acc. to UL 758 & CSA C22.2 No.210
Conductor	4x2x26/7 AWG
Insulation, Material	polyolefin (foamed)
Insulation-Ø	ca. 1.0 mm
Pair screen	plastic laminated aluminium foil (overlapping)
Screen	braid of tinned copper wire
Outer sheath, material	PUR, similar to RAL 6018
Outer sheath-Ø	ca. 6.4 mm
Minimum bending radius	fixed: 4 × outer diameter occasional flexing: 10 × outer diameter
Flammability	acc. IEC 60332-1-2 resp. EN 60332-1-2 HFT acc. UL 1581 §1090
Halogen free	acc. to VDE 0472-815
UV resistance	acc. to. ISO 4892-2, method A
Oil resistance	acc. to. EN 50363-10-2

2170570	DATA SHEET	
Valid from: 26.03.2026	ETHERLINE® PN CABINET Cat.6A	

Standards


Product standard, RJ45-connector	IEC 60603-7-51
Generic cabling for customer premises – General requirements	ISO/IEC 11801-1
Application-neutral communication cable systems	PROFINET Installation Guideline

Approvals

UL wiring harness traceability	present
--------------------------------	---------

Technical drawing

Dimensional drawing

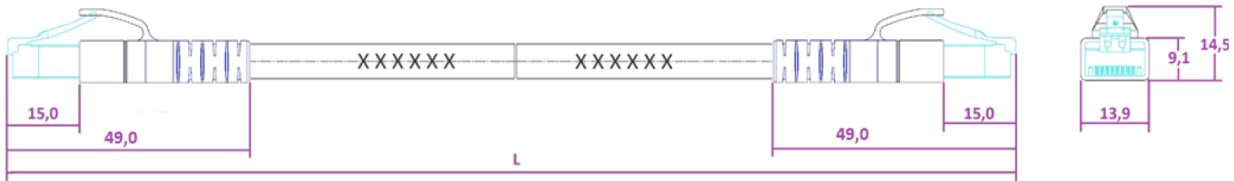

Application range

Automation, industrial machinery and plant engineering, control cabinet applications in controlled environment

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

We reserve all rights according to DIN ISO 16016