

19076900	DATA SHEET	
Valid from: 11.06.2026	EPIC® H-B 16 SD-LB	

Description

- For inserts with high properties
- Industrial standard



General Characteristics

Series	H-B 16
Version	Surface-mount base with cover
Locking	Single lever
Cable entry	Side, see table
Protection (DIN EN 60529)	IP 65 (latched with hood)
Temperature Range	-40°C to +125°C

Materials / Surfaces

Housing	Aluminium alloy, powder-coated, grey
Lever	Steel, galvanized
Sealing	NBR
Cover	Aluminium alloy, powder-coated, grey

Standard

Safety Standard	IEC 61984
-----------------	-----------

Approvals


UL-Approval, E-File-Number	In preparation
----------------------------	----------------

Versions

Article number	Article description	Cable entry (right)	Cable entry (left)
19076900	EPIC H-B 16 SDR-LB M25	M25	-
19078900	EPIC H-B 16 SDRL-LB M25	M25	M25

19076900	DATA SHEET	
Valid from: 11.06.2026	EPIC® H-B 16 SD-LB	

Technical Drawings

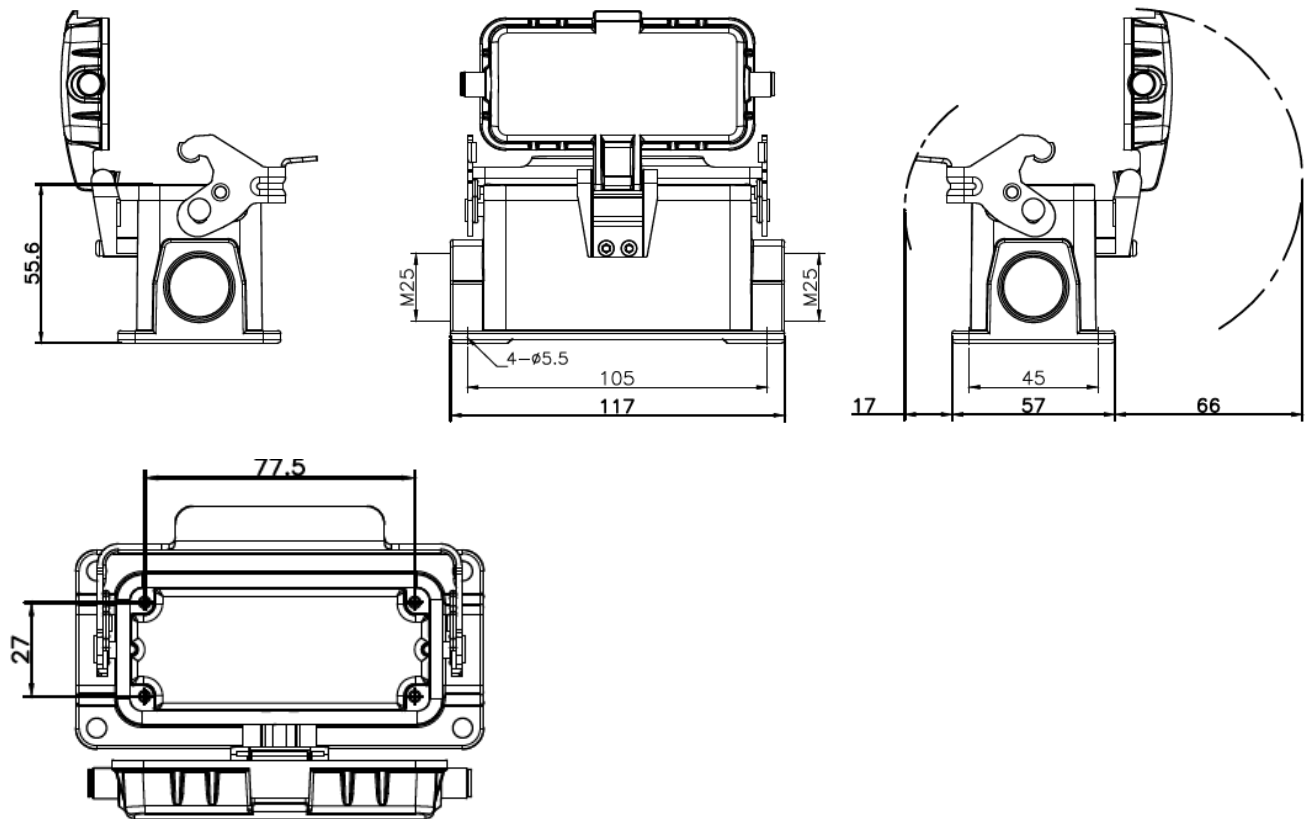

Automation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Info

Universal, robust metal housings size H-B 16

Application range

Plant engineering, Light & sound technology, Plastics industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: THB01/PDP Released: TODV1/PDP	Document: DB19076900EN Version: 03	Page 2 of 2
---	---------------------------------------	-------------