

70444000	DATA SHEET	
Valid from: 08.06.2026	EPIC® H-A 10 AD-LB	

Description

- These connectors are attractive because of their compact housing.
- Small and space-saving for narrow available space



General characteristics

Series	H-A 10
Version	Panel-mount base
Locking	single lever
Protection cover	yes
Protection (DIN EN 60529)	IP 65 (latched)
Temperature range	-40°C to +125°C

Materials and surfaces

Housing	Aluminium alloy, powder-coated, grey
Lever	Steel, galvanized
Gasket	NBR

Approvals

UL File Number	In preparation
----------------	----------------


Standards

Safety Standard	IEC 61984
-----------------	-----------

Creator: LEBU1 / PDP Released: THBO1 / PDP	Document: DB70444000EN Version: 02	Page 1 of 3
---	---------------------------------------	-------------

70444000	DATA SHEET	
Valid from: 08.06.2026	EPIC® H-A 10 AD-LB	

Technical Drawings

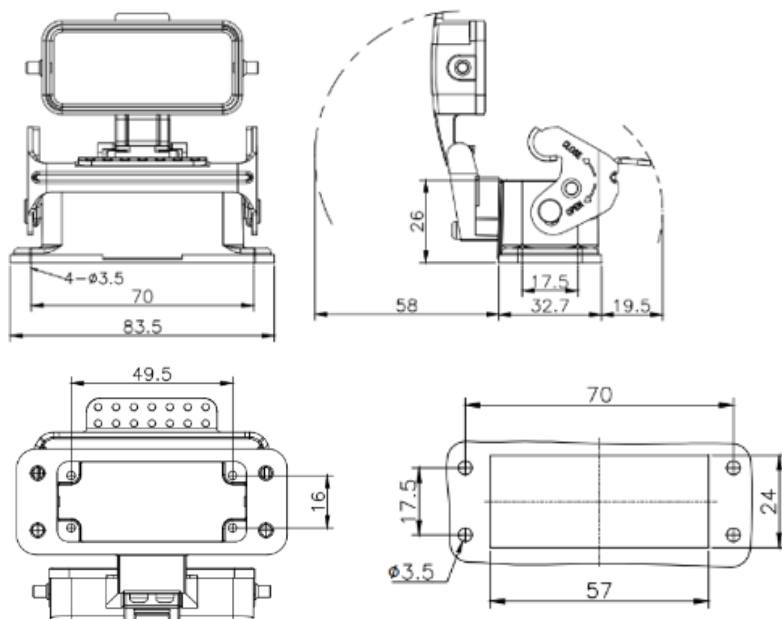

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Info

Compact, robust metal housings size H-A 10

Application range

Machine and equipment manufacturing
Control engineering
Electronic laboratory

Creator: LEBU1 / PDP Released: THBO1 / PDP	Document: DB70444000EN Version: 02	Page 2 of 3
---	---------------------------------------	-------------

70444000	DATA SHEET	
Valid from: 08.06.2026	EPIC® H-A 10 AD-LB	

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: LEBU1 / PDP Released: THB01 / PDP	Document: DB70444000EN Version: 02	Page 3 of 3
---	---------------------------------------	-------------