

|                           |                          |                                                                                     |
|---------------------------|--------------------------|-------------------------------------------------------------------------------------|
| 79135200                  | <b>DATA SHEET</b>        |  |
| Valid from:<br>12.06.2026 | <b>EPIC® H-B 24 SGRH</b> |                                                                                     |

## Description

- Ideal for many applications due to a wide range of housings and inserts



## General Characteristics

|                           |                    |
|---------------------------|--------------------|
| Series                    | H-B 24             |
| Version                   | Surface mount base |
| Locking                   | Double lever       |
| Cable entry               | Side, see table    |
| Protection (DIN EN 60529) | IP 65 (latched)    |
| Temperature Range         | -40°C to +125°C    |

## Materials and Surfaces

|         |                                      |
|---------|--------------------------------------|
| Housing | Aluminium alloy, powder-coated, grey |
| Lever   | Stainless steel                      |
| Sealing | NBR                                  |

## Approvals

|                            |                |
|----------------------------|----------------|
| UL-Approval, E-File-Number | In preparation |
|----------------------------|----------------|

## Standard

|                 |           |
|-----------------|-----------|
| Safety Standard | IEC 61984 |
|-----------------|-----------|


## Versions

| Article number | Article description   | Cable entry<br>(right) | Cable entry<br>(left) |
|----------------|-----------------------|------------------------|-----------------------|
| 79135200       | EPIC H-B 24 SGRH M25  | M25                    | -                     |
| 79135400       | EPIC H-B 24 SGRH M32  | M32                    | -                     |
| 79136200       | EPIC H-B 24 SGRLH M25 | M25                    | M25                   |
| 79136400       | EPIC H-B 24 SGRLH M32 | M32                    | M32                   |

|                                           |                                       |             |
|-------------------------------------------|---------------------------------------|-------------|
| Creator: THBO1/PDP<br>Released: TODV1/PDP | Document: DB79135200EN<br>Version: 03 | Page 1 of 2 |
|-------------------------------------------|---------------------------------------|-------------|

|                           |                          |                                                                                     |
|---------------------------|--------------------------|-------------------------------------------------------------------------------------|
| 79135200                  | <b>DATA SHEET</b>        |  |
| Valid from:<br>12.06.2026 | <b>EPIC® H-B 24 SGRH</b> |                                                                                     |

## Technical Drawings

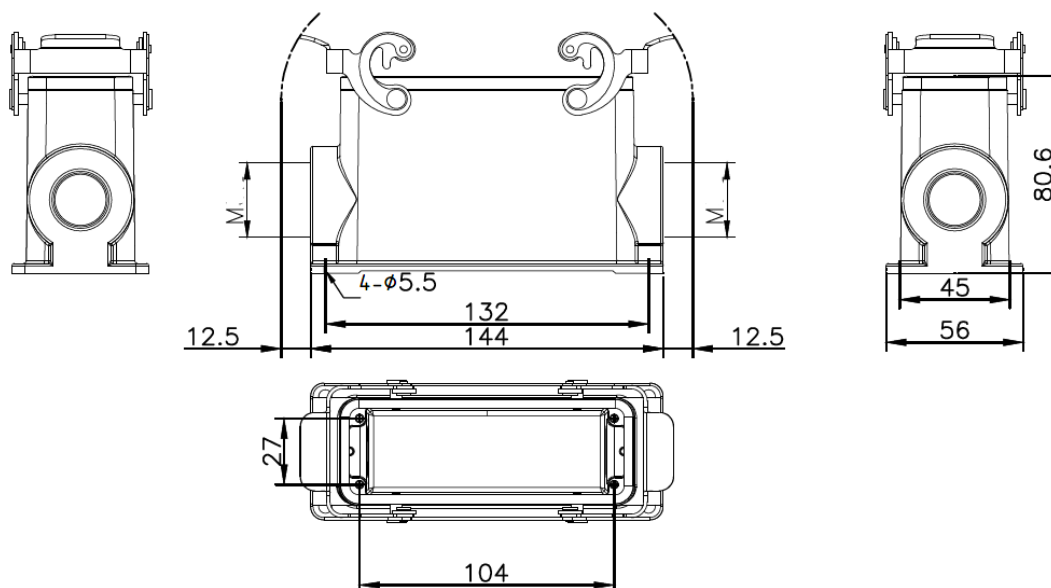

Automation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

## Info

Universal, robust metal housings size H-B 24

## Application range

Plant engineering  
Light & sound technology  
Plastics industry

## Remark

Photographs are not to scale and do not represent detailed images of the respective products.

|                                           |                                       |             |
|-------------------------------------------|---------------------------------------|-------------|
| Creator: THB01/PDP<br>Released: TODV1/PDP | Document: DB79135200EN<br>Version: 03 | Page 2 of 2 |
|-------------------------------------------|---------------------------------------|-------------|